

Computer power supply

Model: **AK-B1-500E**





Product code	AK-B1-500E	
Product type	Computer power supply	
Format	ATX 2.31	
Series	Basic	
Power consumption	< 5 A	
Efficiency	> 70 %	
80 PLUS compatibility	No	
80 PLUS certificate	None	
Current on the +3.3V rail	30 A	
Current on the +5V rail	34 A	
Maximum load on $+3.3V$ and $+5V$ line	250 W	
Current on the +12V rail	21 A	
Maximum load on 12V line	252 W	
Maximum power	500 W	
Mainboard Power Connector	24-pin	
Power connector ATX12V P4	1 pc	
Power connector EPS12V 8 pin	None	
Power connector PCI-E 6 pin	None	
Power connector PCI-E 6+2 pin	None	
Power connector PCI-E 8 pin	None	
Molex connector	2 pcs	
Mini-Molex connector	None	
SATA connector	3 pcs	
Modular power supply	No	
PFC filter	Passive	
Mechanical switch	Yes	
Ground wire	Yes	
OVP	Yes	
ОСР	Yes	
OPP	Yes	
ОТР	Yes	
SCP	Yes	
UVP	None	
Power supply connector	IEC C14	
Fan size	120 mm	
Fan adjustments	Automatic	
Cable length	30 - 60 cm	
Power cable included	No	
Material	Galvanized steel	
Product color	Grey	

•			

MTBF	100000 h
Temperature	5 - 50 °C
Package	ЕсоВох
Product size (L x W x H)	200 x 150 x 85 mm
Package size (L x W x H)	220 x 160 x 95 mm
Net weight	1.01 kg
Gross weight	1.09 kg
CE compatibility	Yes
FCC compatibility	No
RoHS compatibility	Yes
REACH compatibility	Yes
EAN code	5901720133236
Warranty	24 months

































Description

Akyga® **AK-B1-500E** ATX power supply **500W** is one of the basic power supplies in our offer dedicated to power desktop computers.

Made of high quality components, the power supply has a **3x SATA** connectors, **2x MOLEX** connectors, **P4 4-pin** connector and an universal **24-pin** motherboard connector. Supports **ATX 12V 2.0** specifications, so it can be used with current and next generation of platforms with multi-core processors. Silent 12 cm fan with chromed grill provide efficient cooling. **Manual on/off switch** allows for safe power cut off without the need of disconnecting the network cord. High efficiency and stable operation of the power supply affects the reliability of all computer components.

Several important protectors (OVP, OCP, OPP, OTP, SCP) and **PFC filter** protect and prevent main computer parts from damage and stabilize the operation of the power supply so that it works without any unwanted interference.

Cable map

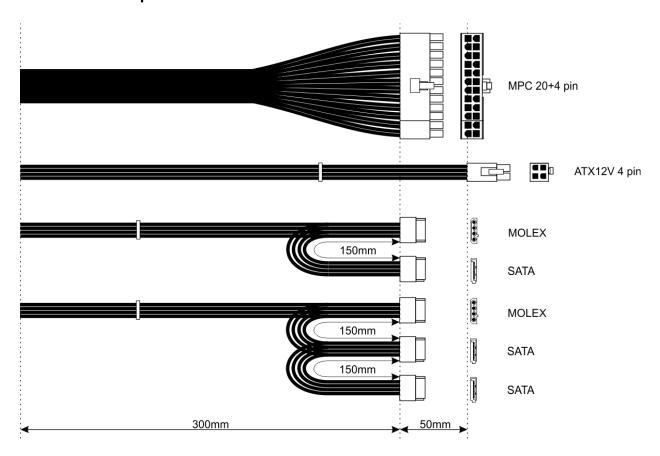

Nameplate

